



# HDMI Extender Via One MPO Fiber MPO Connector Extends HDMI 4K2K@60Hz Link Up To 200 Meters

## Description

APAC's **AH-UD-200-MPO** optical extender provides a high quality and uncompressed **HDMI** data link between source and sink devices. Go though the optical fiber technologies, this extender can enable transmission of **4K2k@60Hz** video/Audio signals up to **200m in MPO multimode fibers**. Where radio frequency interference phenomenon is literally ruled out, which shows the advantage of high performance and good signal quality as well as low cost.




## Features

- Extend the distances up to 200m (660 feet) with a high resolution 3840\*2160@60Hz.
- HDCP fully compliant without copper wire.
- Data transmission fully compliant without copper wire
- No RF interference by optical fiber
- Class 1 laser product complies with EN 60825-1

## Application

- Remote monitor for medical, industrial, military control
- Far-end LCD, Projector, Plasma display connection
- Large video wall system

## Application Note

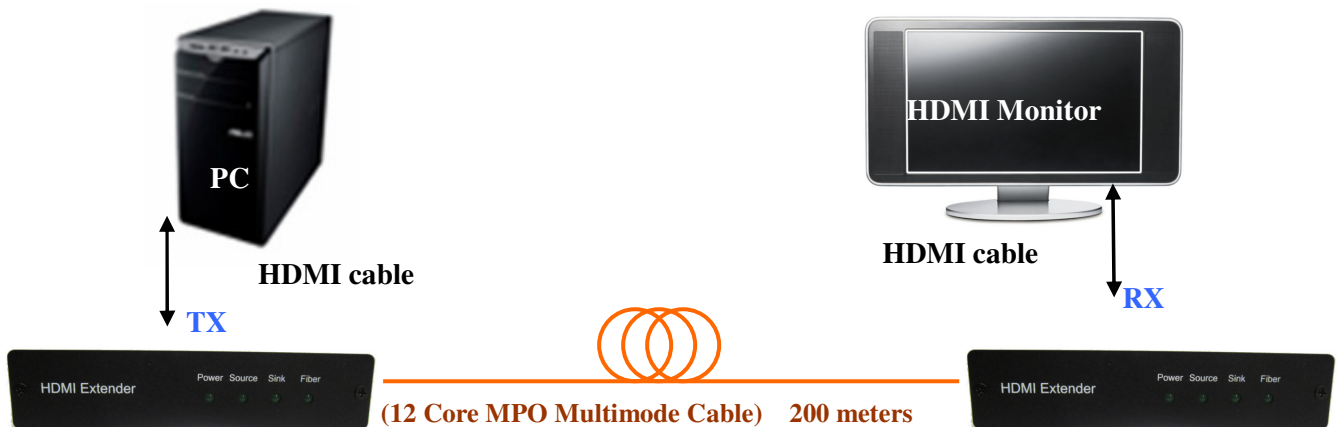



# HDMI Extender Via One MPO Fiber MPO Connector

## Extends HDMI 4K2K@60Hz Link Up To 200 Meters

### Ordering information

#### Part Number

AH-UD-200-MPO-XX

00: US Plug for AC adaptor

01: EU Plug for AC adaptor

02: BS Plug for AC adaptor

03: AU Plug for AC adaptor

This product does not include optical fibers

### Package include

- TX box × 1
- RX box × 1
- 5V adaptor × 2

Optional : US/EU/BS/AU Plug change kit of 5V adaptor

### Specification

PARAMETER	SPECIFICATION	NOTE
Max length	200M	
Max resolution	3840x2160	
Max video bandwidth	6 Gbps per channel	
HDCP compliant	YES	
Optical connector	MPO	
Recommended Fiber	50/125 um MMF	
Optical property	850nm	
Optical Link Power Budget	10dB (min)	
Operating voltage	DC 5V	
Electrical Power consumption	TX: 4W RX: 4W	5V/800mA 5V/800mA
Operating Temperature	-10°C to 50°C	
Storage Temperature	-20°C to 75°C	
Dimension	141 × 72.4 × 30	L × W × H (mm)
Weight	255g	TX unit or RX unit



# HDMI Extender Via One MPO Fiber MPO Connector


## Extends HDMI 4K2K@60Hz Link Up To 200 Meters

### Requirements


- HDMI Source (PC/NB/MAC graphic card HDMI output)
- HDMI Sink (HDMI monitor or projector)
- 100~240VAC 50~60Hz 0.2A electricity

### Adaptor Specification

PARAMETER	SPECIFICATION	NOTE
Input	100~240VAC	US/EU/BS/AU Plug is optional
Output	DC 5V	2.0 A
DC Jack	Inside 5V / Outside ground	

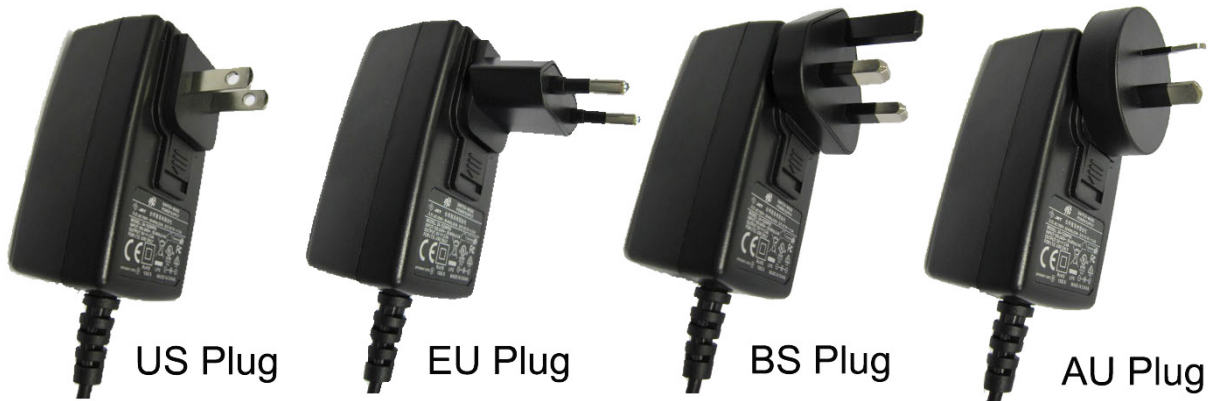

### MPO Cable Fiber Assignment

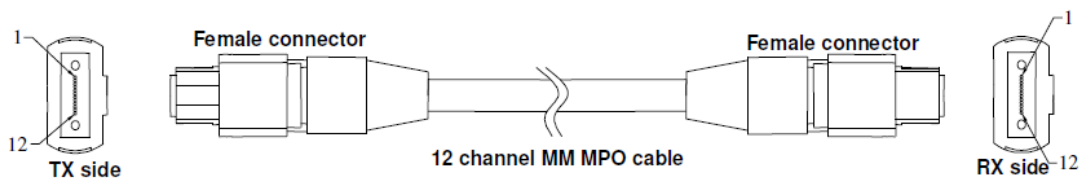



# HDMI Extender Via One MPO Fiber MPO Connector Extends HDMI 4K2K@60Hz Link Up To 200 Meters

## HDCP compliant

HDCP (High-bandwidth Digital Content Protection) is one kind of copy protection by digital signal handshake. It is required for HDMI device. The Extender plays the role of a cable to communicate all of HDMI functions, such as all TMDS, DDC, CEC and HPD signal.


## Installation

- Step1. Install TX box close to HDMI signal source, such as PC or NB.
- Step2. Install RX box close to HDMI sink, such as HDMI monitor or projectors.
- Step3. Connect TX box and RX box through optical fiber cable (MPO).
- Step4. Apply 5V adaptor power to TX box and RX box.
- Step5. Connect HDMI cable from TX box to Source.
- Step6. Connect HDMI cable from RX box to Sink.


Note 1: Clean fiber connector before plugging in. The dust will impact fiber communication performance.

Note 2: The length of HDMI cable should be NOT longer than 2 meters.


Note 3: These four indicators in front of TX/RX box represent working status. These 4 LEDs emerged green if all setup is complete and correct. The left one stands for the connection of power supply. The second light stands for the connection of HDMI source. The third light stands for the connection of HDMI sink. The right one stands for the connection of fiber between the TX box and RX box.

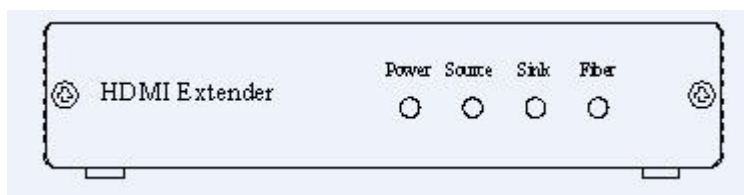

**Dimensions**

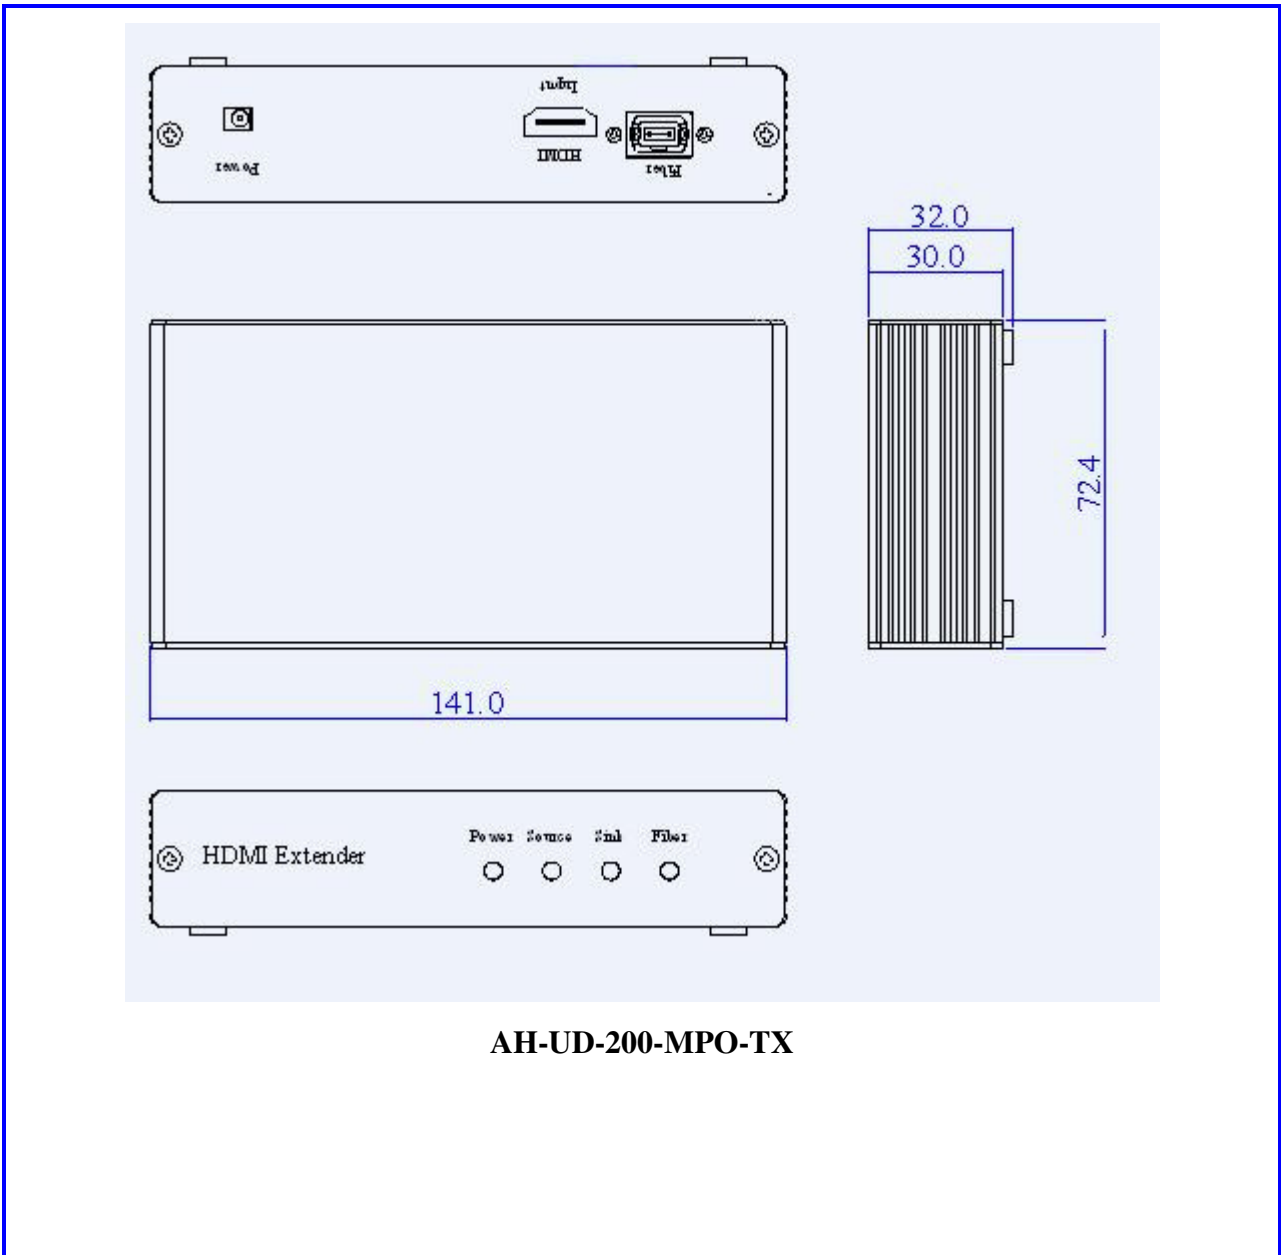

**AH-UD-200-MPO-TX**

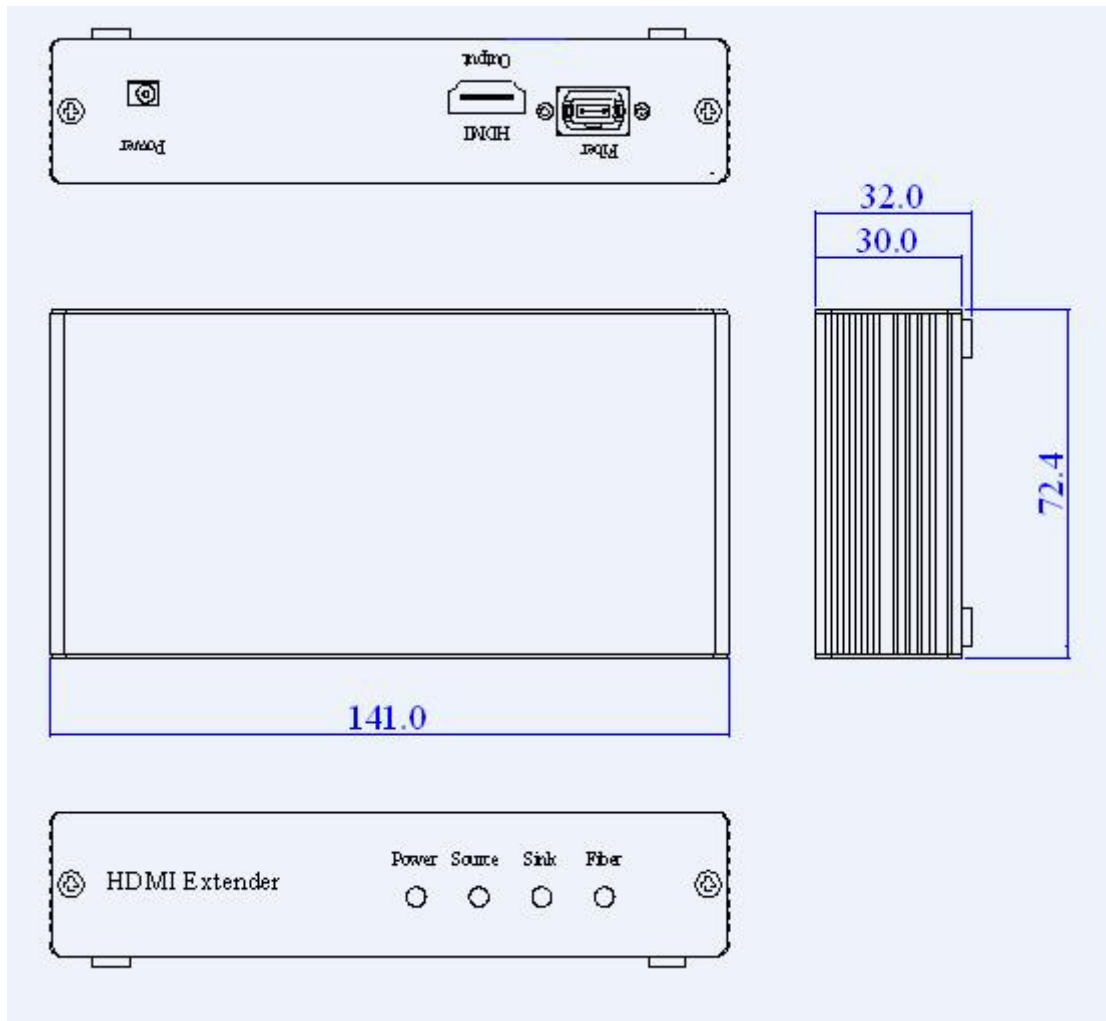

**AH-UD-200-MPO-RX**

All dimensions all in +/- 0.3mm tolerance if no specified

Unit : mm

**Safety Regulation**

**CE and FCC approved.**

