



RoHS compliant
TX-1310/RX-1270 nm Single-mode Bi-directional, SMF 60km
SFP LC Simplex Connector
25GBASE-BR



Features

- Compliant with SFP+ MSA SFF-8431
- Compliant with SFF8472 diagnostic monitoring interface
- Compliant to optical interface with IEEE802.3cp 25GBASE-BR requirements.
- Single power supply 3.3V
- Hot Pluggable
- EML laser and APD receiver
- Class 1 laser product complies with EN 60825-1
- Link distance up to 50km single mode fiber without FEC
- Link distance up to 60km single mode fiber with FEC
- 23dB link budget

Ordering Information

PART NUMBER	WAVELENGTH	TEMPERATURE	DISTANCE
LG38-J3U-TC-N31	TX1310nm/RX1270nm	0°C to 70°C	50km ~ 60km
LG38-J3U-TI-N31	TX1310nm/RX1270nm	-40°C to 85°C	50km ~ 60km

Transmission distance: Attenuation of 0.35 dB/km @1310nm is used for the link length calculations

Diagnostics

PARAMETER	RANGE	ACCURACY	UNIT	CALIBRATION
Temperature	-40 to 85	± 3	°C	
Voltage	3.14 to 3.46	± 0.1	V	
Bias Current	0 to 120	± 10%	mA	Internal
TX Average Power	+2 to +6	± 3	dB	
RX Average Power	-5 to -21	± 3	dB	



RoHS compliant
TX-1310/RX-1270 nm Single-mode Bi-directional, SMF 60km
SFP LC Simplex Connector
25GBASE-BR

Absolute Maximum Ratings

PARAMETER	SYMBOL	MIN	MAX	UNITS	NOTE
Storage Temperature	T_S	-40	85	°C	
Supply Voltage	V_{CC}	-0.4	3.6	V	
Operating Relative Humidity	RH	5	85	%	
Average receive power (max)	P_{Damage}	---	-3	dBm	

Recommended Operating Conditions

PARAMETER	SYMBOL	MIN	MAX	UNITS	NOTE
Case operating Temperature	T_C	0	70	°C	C-Temp
		-40	85		I-Temp
Supply Voltage	V_{CC}	3.14	3.46	V	
Supply Current@3.3V	$I_{TX} + I_{RX}$	---	424	mA	C-Temp
			515		I-Temp
Power Consumption@3.3V	P	---	1.4	W	C-Temp
			1.7		I-Temp



RoHS compliant
 TX-1310/RX-1270 nm Single-mode Bi-directional, SMF 60km
 SFP LC Simplex Connector
 25GBASE-BR

Transmitter Electro-optical Characteristics

$V_{CC} = 3.14 \text{ V to } 3.46 \text{ V}$, $TC = 0^\circ \text{C to } 70^\circ \text{C}$, $TI = -40^\circ \text{C to } 85^\circ \text{C}$

PARAMETER	SYMBOL	MIN	TYP.	MAX	UNITS	NOTE
Bit Rate	B	24	25.78	26.5	Gbps	
Average Launch Power	P_{avg}	+2	---	+6	dBm	(1)
Optical Modulation Amplitude(OMA)	P_{oma}	+3		+6	dBm	
Extinction Ratio	ER	6.5	---	---	dB	
Center Wavelength	λ_c	1300	1310	1320	nm	
Spectral Width (-20dB)	$\Delta\lambda$	---	---	1	nm	
Side Mode Suppression Ratio	$SMSR$	30			dB	
Transmitter eye mask definition {X1, X2, X3, Y1, Y2, Y3}		{0.31, 0.4, 0.45, 0.34, 0.38, 0.4}				Hit ratio 5×10^{-5} hits per sample.
Max. P_{out} TX-DISABLE Asserted	P_{OFF}	---	---	-45	dBm	
Max power and dispersion penalty	TDP			1	dB	
Differential Input Voltage	V_{DIFF}	200		1000	mV	
Transmit Fault Output-Low	TX_FAULT_L	0.0	---	0.5	V	
Transmit Fault Output-High	TX_FAULT_H	2.4	---	V_{CC}	V	
TX_DISABLE Assert Time	t_{off}	---	---	100	μs	
TX_DISABLE Negate Time	t_{on}	---	---	2	ms	
Time to initialize, include reset of TX_FAULT	t_{init}	---	---	300	ms	
Tx_Fault assert for cooled module	t_{fault}	---	---	50	ms	
TX_DISABLE time to start reset	t_{reset}	10	---	---	μs	



RoHS compliant
TX-1310/RX-1270 nm Single-mode Bi-directional, SMF 60km
SFP LC Simplex Connector
25GBASE-BR

Receiver Electro-optical Characteristics

$V_{CC} = 3.14 \text{ V to } 3.46 \text{ V}$, $TC = 0^\circ\text{C to } 70^\circ\text{C}$, $TI = -40^\circ\text{C to } 85^\circ\text{C}$


PARAMETER	SYMBOL	MIN	TYP.	MAX	UNITS	NOTE
Data Rate	B	24	25.78	26.5	Gbps	
Average Receive Power		-21		-5	dBm	(1)
Receiver Sensitivity(OMA)	P_{IN}	---	---	-20	dBm	@BER=5E-5
Operating Center Wavelength	λ_C	1260	1270	1280	nm	
Optical Return Loss	ORL	26	---	---	dB	
Loss of signal -Deasserted	P_D	---	---	-23	dBm	
Loss of signal -Asserted	P_A	-35	---	---	dBm	
Differential Output Voltage	V_{DIFF}	500	---	1000	mV	
Receiver Loss of Signal Output Voltage-Low	RX_LOS_L	0	---	0.5	V	
Receiver Loss of Signal Output Voltage-High	RX_LOS_H	2.4	---	V_{CC}	V	
Receiver Loss of Signal Assert Time (off to on)	t_{A,RX_LOS}	---	---	100	μs	
Receiver Loss of Signal Assert Time (on to off)	t_{D,RX_LOS}	---	---	100	μs	

Note1: Average launch power (min) is informative and not the principal indicator of signal strength. A transmitter with launch power below this value cannot be compliant; however, a value above this does not ensure compliance.


Timing Parameters

PARAMETER	SYMBOL	MIN	TYP.	MAX	UNITS	NOTE
Time to initialize	t_{start_up}			10	s	



Block Diagram of Transceiver

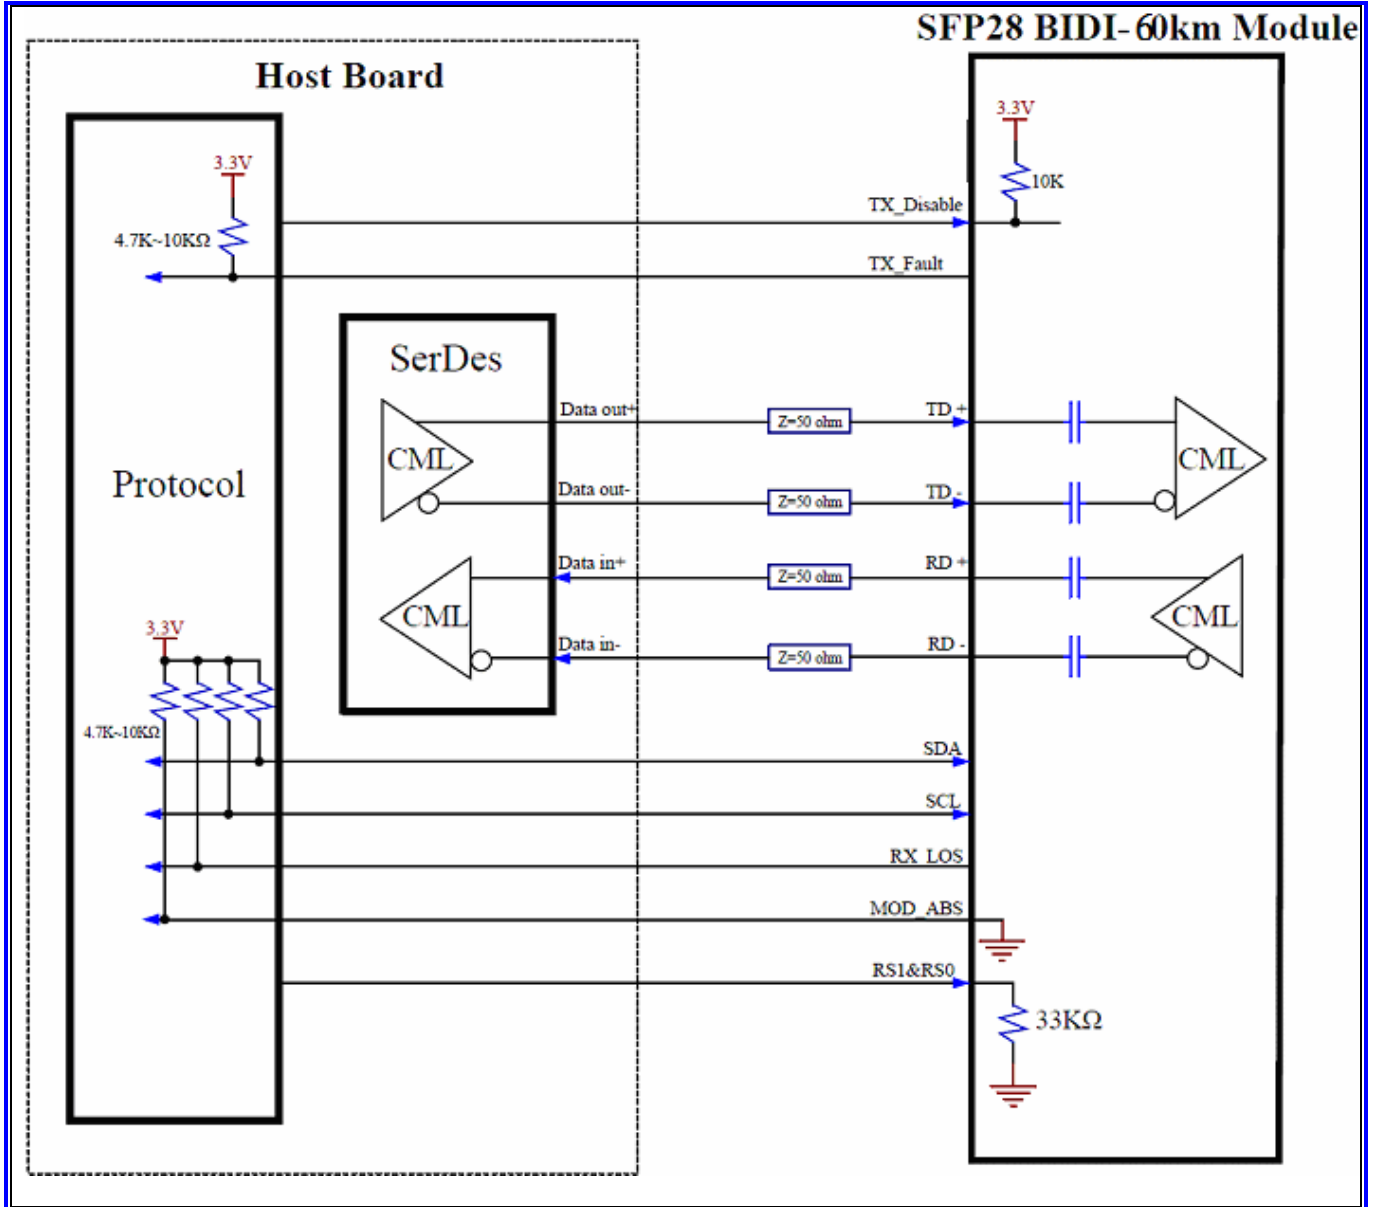

Dimensions

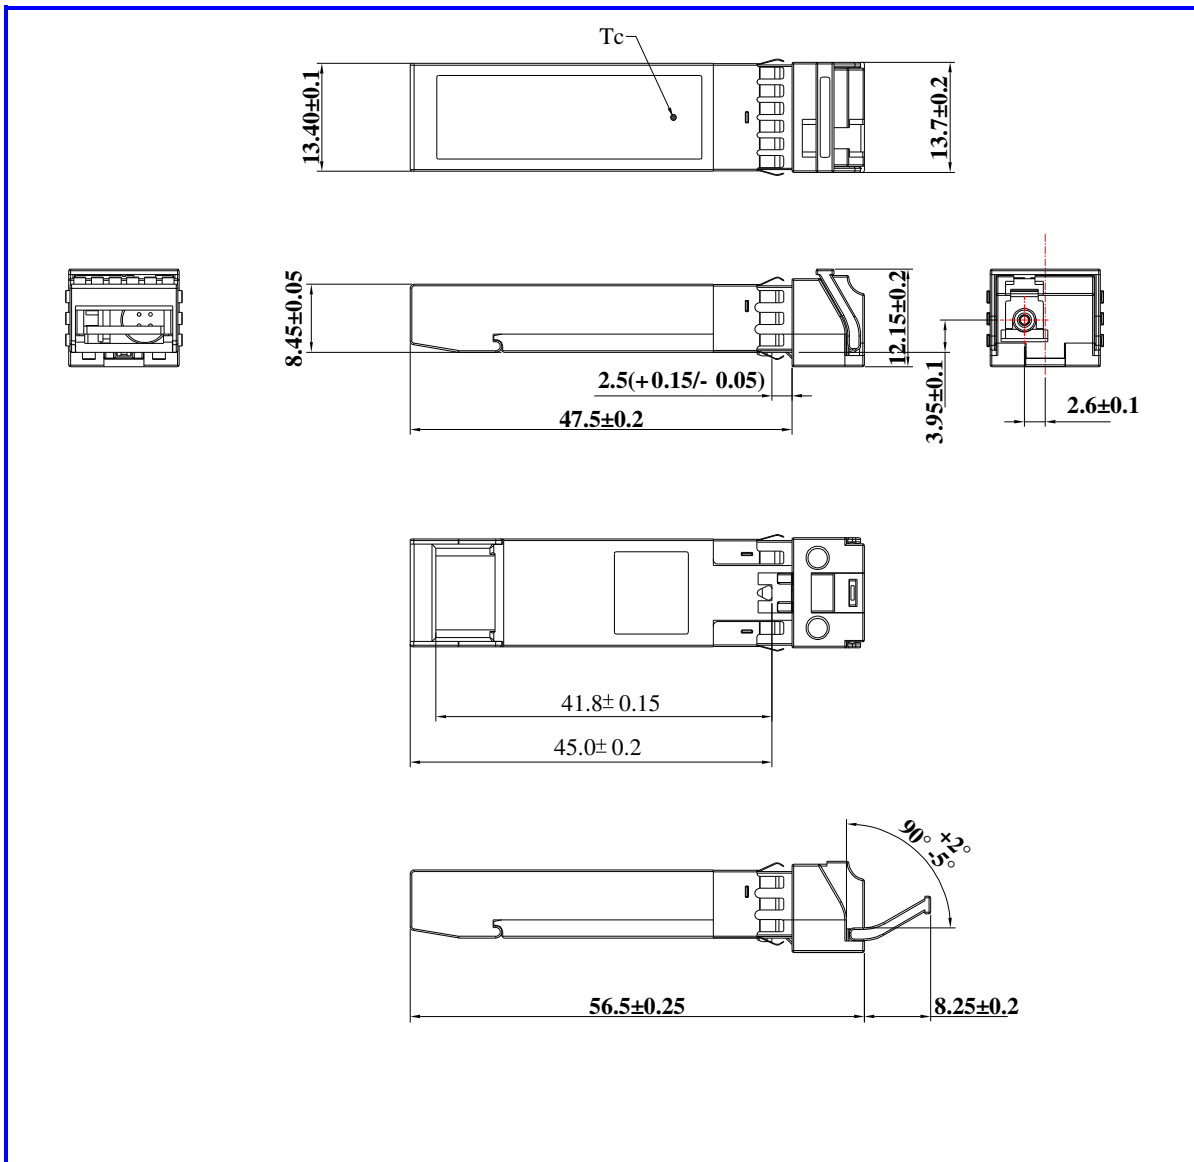

SFP host board mechanical layout

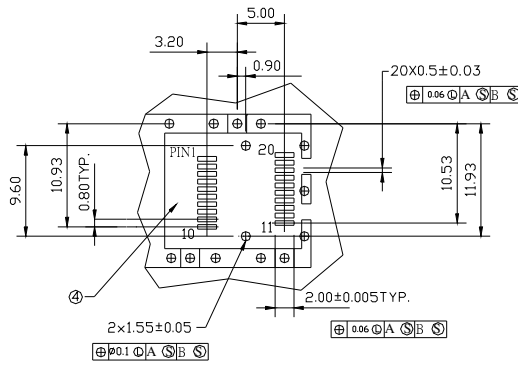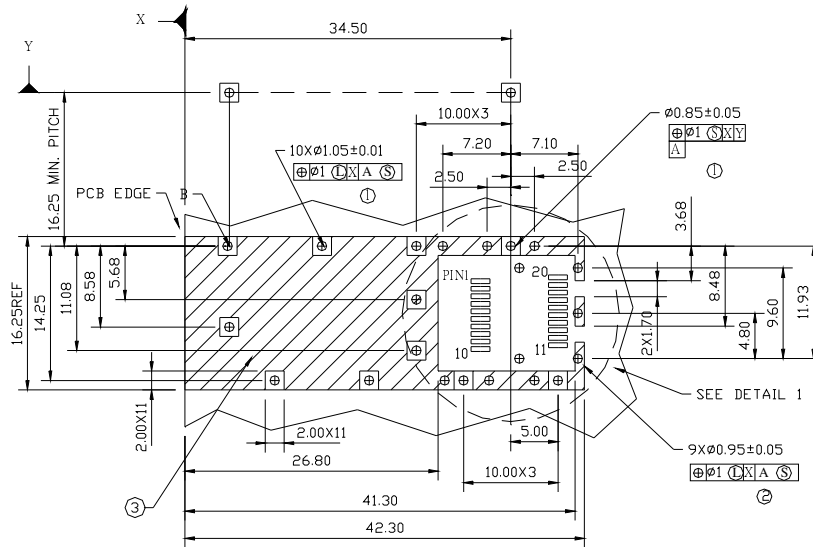

DETAIL 1


LEGEND

- 1.PADS AND VIAS ARE CHASSIS GROUND
- 2.THROUGH HOLES, PLATING OPTIONAL
- 3.HATCHED AREA DENOTES COMPONENT AND TRACE KEEPOUT(EXCEPT CHASSIS GROUND)
- 4.AREA DENOTES COMPONENT KEEPOUT (TRACES ALLOWED)

DIMENSIONS ARE IN MILLIMETERS

Unit: mm

Assembly drawing

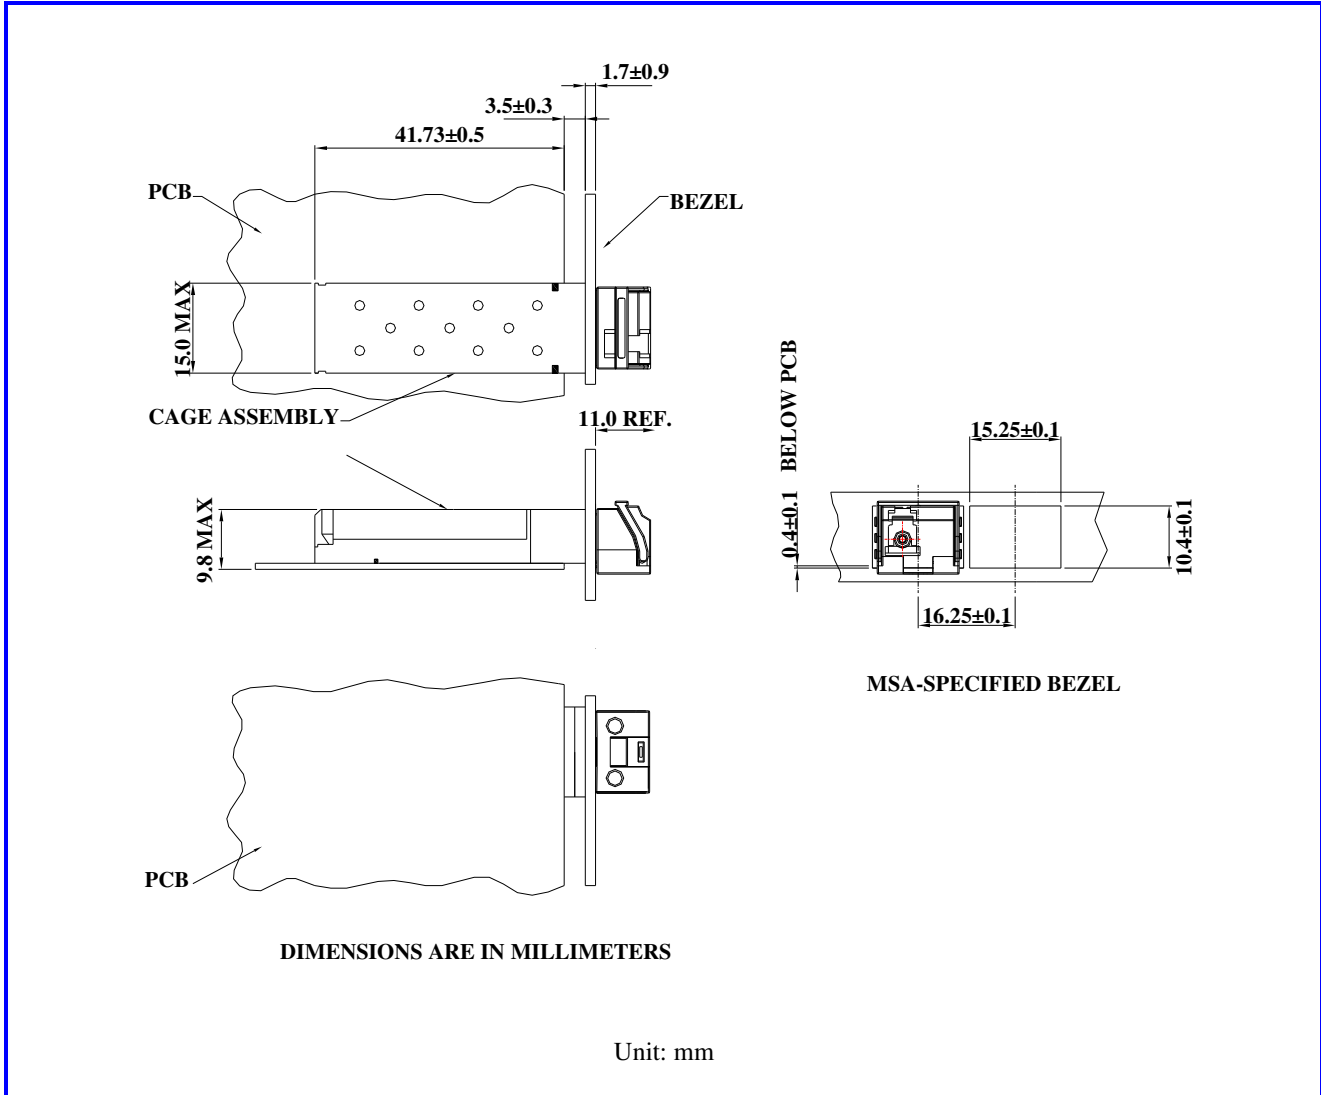




RoHS compliant
TX-1310/RX-1270 nm Single-mode Bi-directional, SMF 60km
SFP LC Simplex Connector
25GBASE-BR

Pin Assignment

Pin-Out



Pin	Signal Name	I/O	Logic	Description	Note
1	<i>VeeT</i>			Transmit Ground	
2	<i>TX_FAULT</i>	O	LVTTL	Transmit Fault	
3	<i>TX_DISABLE</i>	I	LVTTL	Transmit Disable	
4	<i>SDA</i>	I/O	LVTTL	2-wire Serial Interface Data Line	
5	<i>SCL</i>	I/O	LVTTL	2-wire Serial Interface Clock	
6	<i>MOD_ABS</i>			Module Absent, connected to VeeT or VeeR in the module	
7	<i>RS0</i>	I	LVTTL	Rate select 0, not used	1
8	<i>RX_LOS</i>	O	LVTTL	Receiver Loss of Signal	
9	<i>RS1</i>	I	LVTTL	Rate select 1, not used	1
10	<i>VeeR</i>			Receiver Ground	
11	<i>VeeR</i>			Receiver Ground	
12	<i>RD-</i>	O	CML	Receive Data out Bar, AC coupled	
13	<i>RD+</i>	O	CML	Receive Data out, AC coupled	
14	<i>VeeR</i>			Receiver Ground	
15	<i>VCCR</i>			Receiver Power Supply	
16	<i>Vcct</i>			Transmitter Power Supply	
17	<i>VeeT</i>			Transmitter Ground	
18	<i>TD+</i>	I	CML	Transmit Data in, AC coupled	
19	<i>TD-</i>	I	CML	Transmit Data in Bar, AC coupled	
20	<i>VeeT</i>			Transmitter Ground	

Note 1:RS0 and RS1 are module inputs and are pulled low to VeeT with > 30 kΩ resistors in the module.