



1310 nm Single-mode Transceiver Small Form Pluggable (SFP), with Diagnostic Monitoring 2500Base Ethernet



Features

- RoHS compliant
- 2500Base Ethernet application
- SFF8472 diagnostic monitoring interface
- Duplex LC connector
- Single power supply 3.3V
- Hot Pluggable
- Class 1 laser product complies with EN 60825-1

Ordering Information

PART NUMBER	VOLTAGE	TEMPERATURE	DISTANCE
LS38-F3C-TC-N-EC	3.3V	0°C to 70 °C	5KM
LS38-F3C-TI-N-EC	3.3V	-40°C to 85 °C	5KM



1310 nm Single-mode Transceiver
Small Form Pluggable (SFP), with Diagnostic Monitoring
2500Base Ethernet

Absolute Maximum Ratings

PARAMETER	SYMBOL	MIN	MAX	UNITS	NOTE
Storage Temperature	T_S	-40	85	°C	
Supply Voltage	V_{CC}	-0.5	4.0	V	
Input Voltage	V_{IN}	-0.5	V_{CC}	V	

Recommended Operating Conditions

PARAMETER	SYMBOL	MIN	MAX	UNITS	NOTE
Case operating Temperature	T_C	0 -40	70 85	°C	
Bit rate	B		3125	Mbps	
Supply Voltage	V_{CC}	3.135	3.465	V	
Supply Current	$I_{TX} + I_{RX}$	---	300	mA	
Transmit distance	D		5	km	G.652 SMF
Dispersion penalty	DP		2	dB	



1310 nm Single-mode Transceiver
Small Form Pluggable (SFP), with Diagnostic Monitoring
2500Base Ethernet

Transmitter Electro-optical Characteristics

PARAMETER	SYMBOL	MIN	TYP.	MAX	UNITS	NOTE
Output Optical Power	P_{out}	-9	---	-3	dBm	
Extinction Ratio	ER	6	---	---	dB	
Center Wavelength	λ_C	1260	1310	1360	nm	
Spectral Width (RMS)	$\Delta\lambda$	---	---	2.8	nm	
Max. P_{out} TX-DISABLE Asserted	P_{OFF}	---	---	-35	dBm	
Differential Input Voltage	V_{DIFF}	300	---	1200	mV	
Transmit Fault Output-Low	TX_FAULT_L	0.0	---	0.5	V	
Transmit Fault Output-High	TX_FAULT_H	2.4	---	V_{CC}	V	
TX_DISABLE Assert Time	t_{off}	---	---	10	μs	
TX_DISABLE Negate Time	t_{on}	---	---	1	ms	
Time to initialize, include reset of TX_FAULT	t_{init}	---	---	300	ms	
TX_FAULT from fault to assertion	t_{fault}	---	---	100	μs	
TX_DISABLE time to start reset	t_{reset}	10	---	---	μs	



1310 nm Single-mode Transceiver
Small Form Pluggable (SFP), with Diagnostic Monitoring
2500Base Ethernet


Receiver Electro-optical Characteristics

PARAMETER	SYMBOL	MIN	TYP.	MAX	UNITS	NOTE
Optical Input Power-maximum	P_{IN}	-3	---	---	dBm	BER < 10^{-12}
Receiver Sensitivity	P_{IN}	---	---	-15	dBm	BER < 10^{-12}
Operating Center Wavelength	λ_C	1260	---	1360	nm	
Loss of Signal-Asserted	P_A	-15	---	---	dBm	
Loss of Signal-Deasserted	P_D	---	---	-30	dBm	
Differential Output Voltage	V_{DIFF}	400	---	1200	mV	
Receiver Loss of Signal Output Voltage-Low	RX_LOS_L	0	---	0.5	V	
Receiver Loss of Signal Output Voltage-High	RX_LOS_H	2.4	---	V_{CC}	V	
Receiver Loss of Signal Assert Time (off to on)	t_{A,RX_LOS}	---	---	100	μs	
Receiver Loss of Signal Assert Time (on to off)	t_{D,RX_LOS}	---	---	100	μs	



Diagnostics

Parameter	Range	Accuracy	Unit	Calibration
Temperature	-40 to 85	± 3	$^{\circ}C$	Internal
Voltage	3.1 to 3.5	± 0.1	V	
Bias Current	0 to 90	$\pm 10\%$	mA	
TX Power	-9 to -3	± 3 dB	dBm	
RX Power	-15 to -3	± 3 dB	dBm	

Dimensions

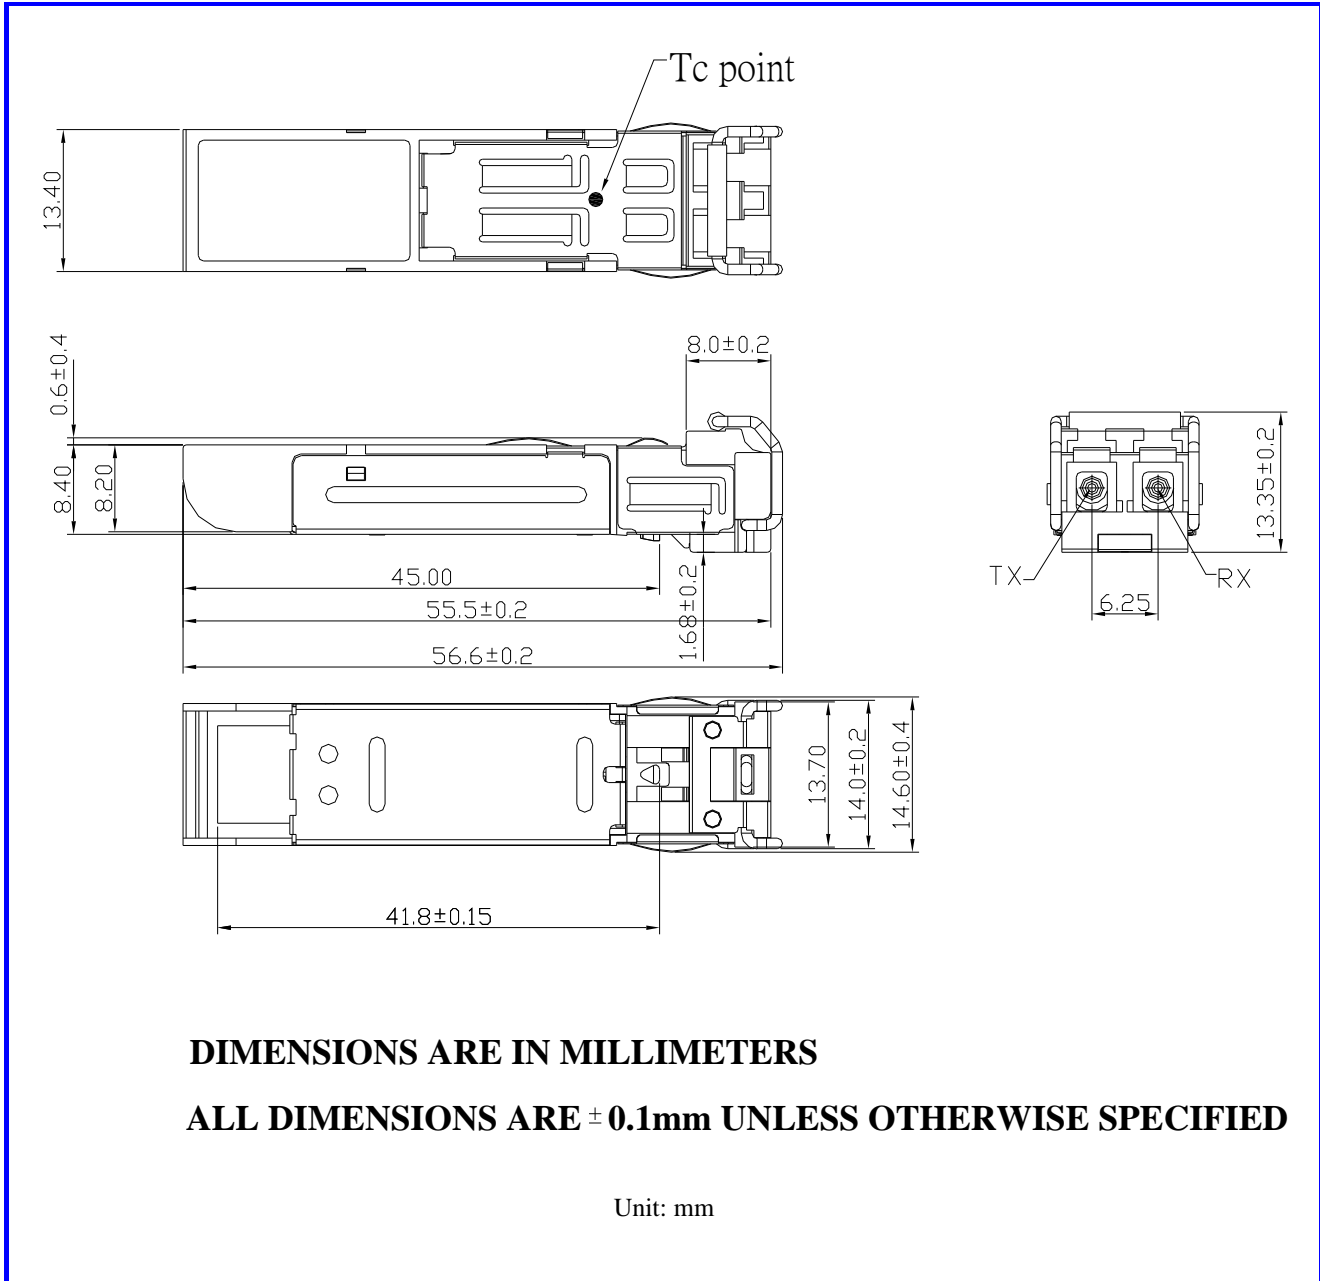

SFP host board mechanical layout

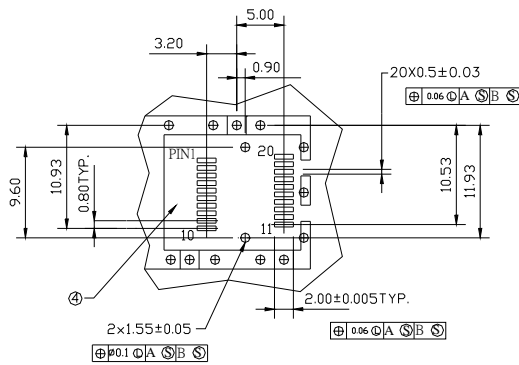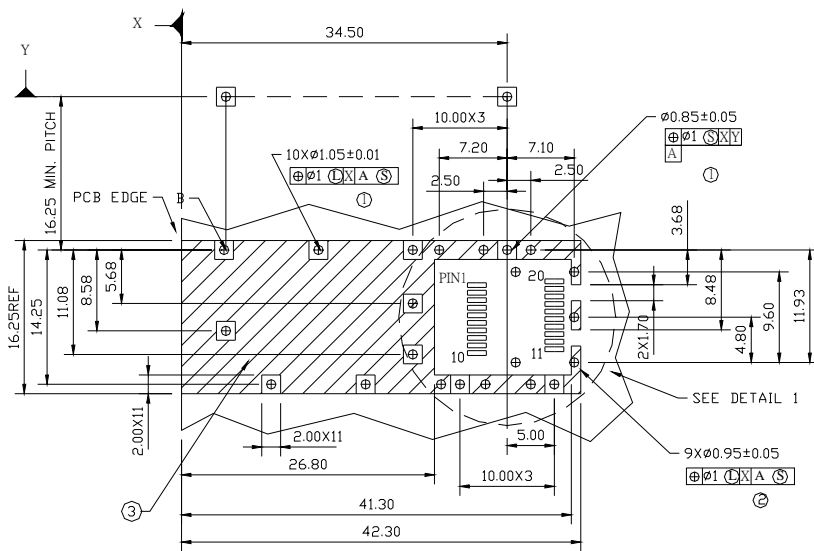

DETAIL 1


LEGEND

- 1.PADS AND VIAS ARE CHASSIS GROUND
- 2.THROUGH HOLES, PLATING OPTIONAL
- 3.HATCHED AREA DENOTES COMPONENT AND TRACE KEEPOUT(EXCEPT CHASSIS GROUND)
- 4.AREA DENOTES COMPONENT KEEPOUT (TRACES ALLOWED)

DIMENSIONS ARE IN MILLIMETERS


Unit: mm

Assembly drawing

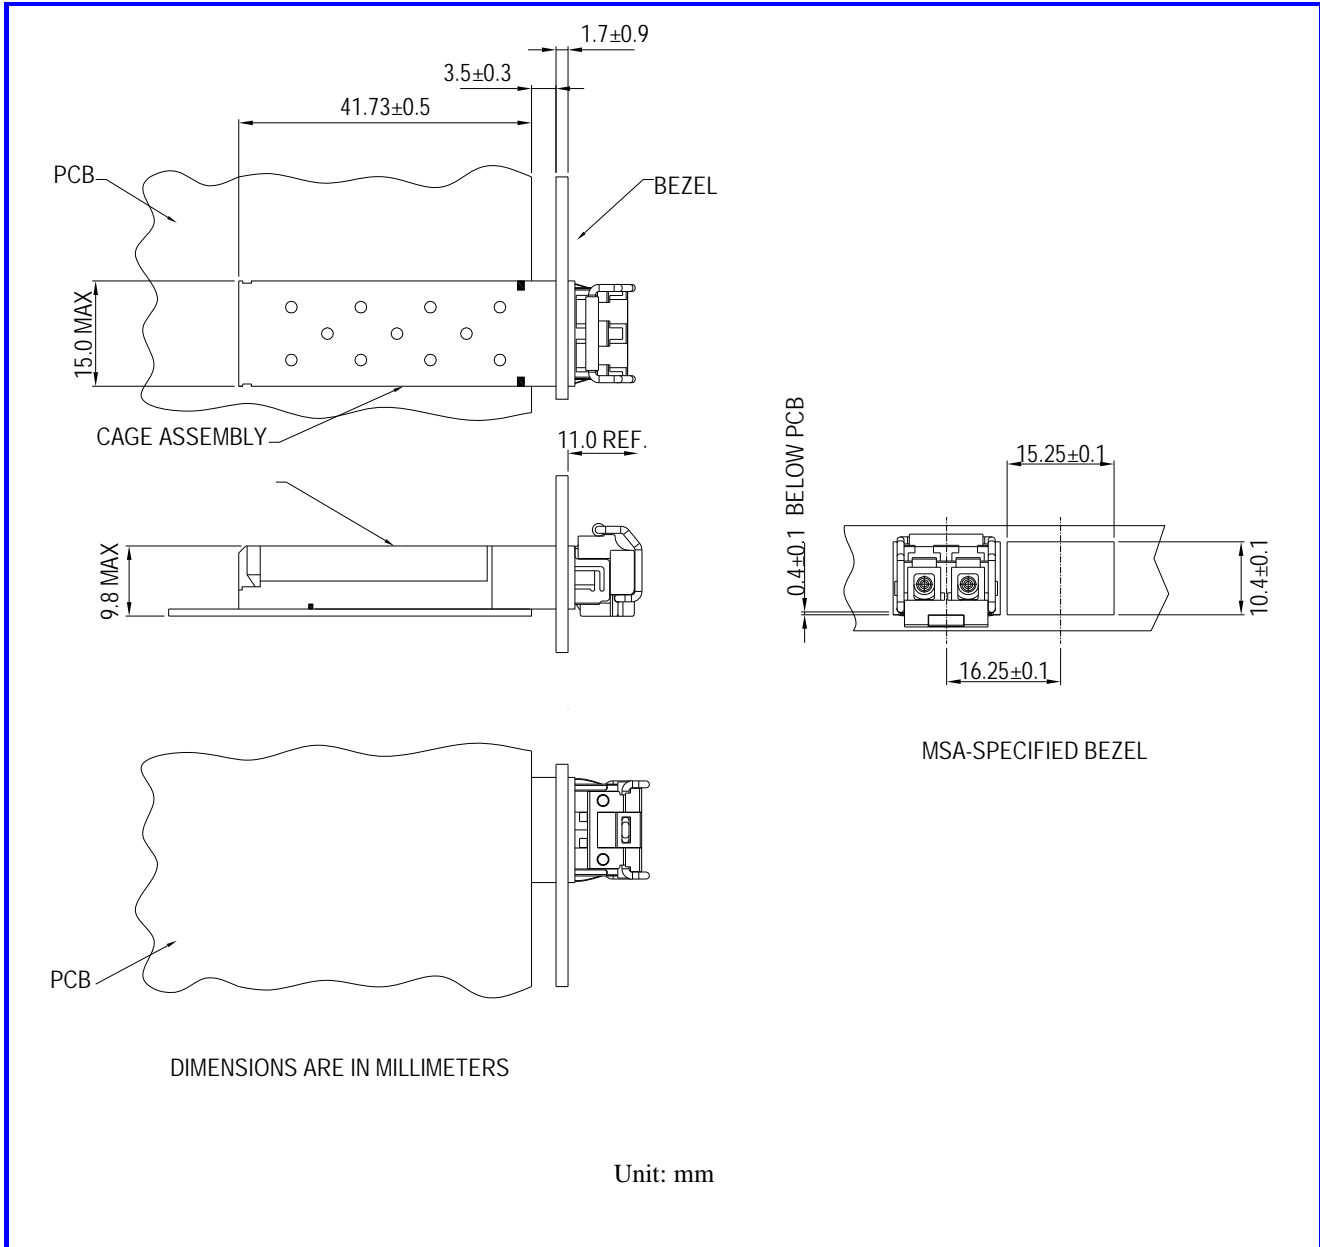

Pin Assignment

Pin-Out

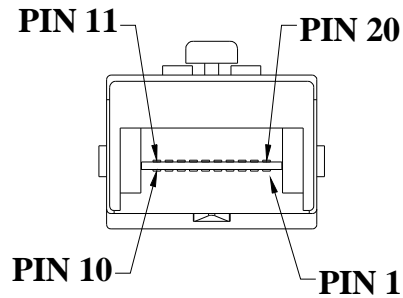

Pin	Signal Name	Description
1	T_{GND}	Transmit Ground
2	TX_FAULT	Transmit Fault
3	$TX_DISABLE$	Transmit Disable
4	$MOD_DEF (2)$	SDA Serial Data Signal
5	$MOD_DEF (1)$	SCL Serial Clock Signal
6	$MOD_DEF (0)$	TTL Low
7	$RATE_SELECT$	Open Circuit
8	RX_LOS	Receiver Loss of Signal, TTL High, open collector
9	R_{GND}	Receiver Ground
10	R_{GND}	Receiver Ground
11	R_{GND}	Receiver Ground
12	$RX-$	Receive Data Bar, Differential , ac coupled
13	$RX+$	Receive Data, Differential , ac coupled
14	R_{GND}	Receiver Ground
15	V_{CCR}	Receiver Power Supply
16	V_{CCT}	Transmitter Power Supply
17	T_{GND}	Transmitter Ground
18	$TX+$	Transmit Data, Differential , ac coupled
19	$TX-$	Transmit Data Bar, Differential , ac coupled
20	T_{GND}	Transmitter Ground

Note : All information contained in this document is subject to change without notice.